


INSTALLATION&CARE

BERORE INSTALLATION:


- If you experience any difficulties that the instruvtions did not cover,please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts beionging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen buibs or the wire assembly until the unit has cooled down after use.

INCLUDES

Quick-connector



LED bar controller installation and care instruction

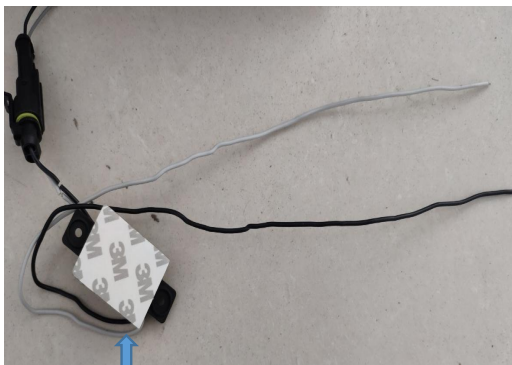


LED bar controller

← gray wire(“+”Positive)

← black wire(“-”negative)

Step1: remove the old headlights and place the new headlights on vehicle.

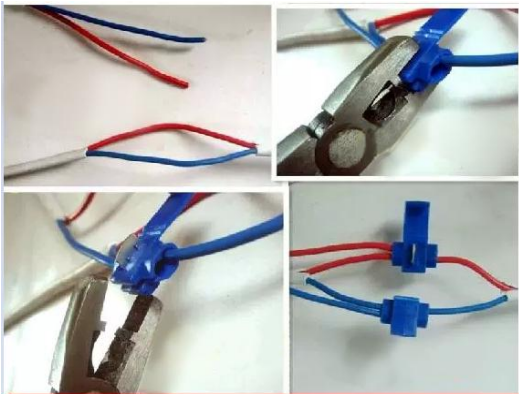

Step2:gray wire connects to “+”positive terminal of side-mark lights using the quick-connector

Step3: black wire connects to “-”negative terminal of side-mark lights using the quick-connector

Step4: secure the LED bar controller using 3M Sitcker beside the headlights.

Step5: Check the wiring connection again