## Before Installation:

Read this instruction carefully before starting installation.

Proper tools will improve the quality of installation and reduce the time required.

If missing parts or any damage found, please take a picture and contact us. Professional installation would be highly recommended.

Periodic check to ensure all mounting hardware remains secure and tight.

#### Step 1:


- 1. Locate (2) mounting positions each side.
- 2. Remove the factory tape and clean the dirt around mounting positions.




-1-

### Step 2:


- 1. Insert (2) M8 clip nuts onto square holes on the inner rocker panel. (Insert M8 clip nut onto the square hole and over the smaller hole next to it).
- 2. Attach the bracket to the inner rocker panel (the vehicle front side first).
- 3. Secure the bracket on the rocker panel with (1) M8 hex bolt, (1) M8 lock washer, (1) M8 flat washer.
- 4. Secure the bracket on the pinch weld with (1) M8 hex bolt, (1) M8 lock washer, (2) M8 flat washers, (1) M8 hex nut.






# Step 3:


- In same mounting position, attach another bracket to the mounting hole next to the first bracket.
- 2. Secure the bracket on the rocker panel with (1) M8 hex bolt, (1) M8 lock washer, (1) M8 flat washer.
- 3. Secure the bracket on the pinch weld with (1) M8 hex bolt, (1) M8 lock washer, (2) M8 flat washers, (1) M8 hex nut.
- 4. Repeat the step 2 and the step 3 to install all brackets.



## Step 4:

- 1. Remove (8) M8 hex bolts and (8) M8 flat washers from the step bar.
- 2. Slide the mounting tracks to proper positions.
- 3. With assistance, lift and attach the step bar to brackets.
  - Secure the step bar on brackets with (8) M8 hex bolts and (8) M8 flat washers.
- 4. Repeat to install the other side step bar, do not fully tighten.





# Passenger Side Front


# Step 5:

- 1. Tighten M8 hex bolts and nuts on vehicle with 15 ft-lbs. torque.
- 2. Adjust the step bar to level and tighten M8 hex bolts with 15 ft-lbs. torque.
- 3. After the step bar installed, periodic check to ensure all mounting hardware remains secure and tight.



	Qty.	Description
1	×8	Mounting Bracket
2	×16	M8 Hexagon Flange Bolt
3	×32	M8 Flat Washer
4	×16	M8 Lock Washer
5	×16	M8 Hexagon Nut
6	×8	M8 Clip Nut
Pre-Installed on Step Bar		
7	×16	M8 Hexagon Flange Bolt
8	×16	M8 Flat Washer



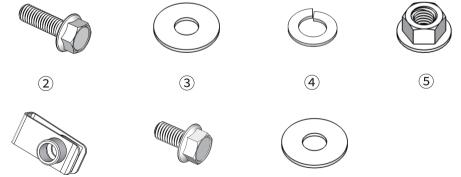

(8)

(7)

-3-