

FLOOR MATS
CARE AND USE INSTRUCTIONS

ABOUT CLEANING:

The easiest way to clean your floor mats is using a damp cloth or sponge with soap and water. Windex®, 409® and ArmorAll® type cleaners work as well.

CONTACT US:

Any question about the OEDRO® floor mats, should you please call us on Monday to Friday from 8:00 AM to 5:00 PM central time at **888-717-8084**, or email us at: **service@oedro.com**.

Steps for reference (amazon.com orders only)
1.Log into your amazon account.
2.Go to your orders and find the purchase order.
3.Click on "Contact Seller".

OEDRO®

FLOOR MATS MANUAL



FLOOR MATS
CARE AND USE INSTRUCTIONS

Thank you for selecting OEDRO® custom fit floor mats.
OEDRO® floor mats use the latest 3D laser scanning technology. Our new patented floor mats design provides your footwell with a perfect fit.

BEFORE INSTALLATION:

Please ensure the floor mats and your car are matched.

During packaging and shipping, some bent edge might exist.Few days later, the mats will match carpet perfectly.

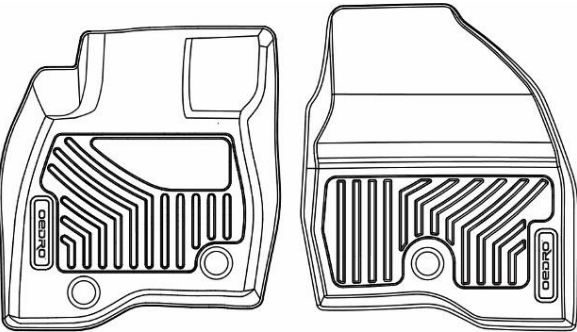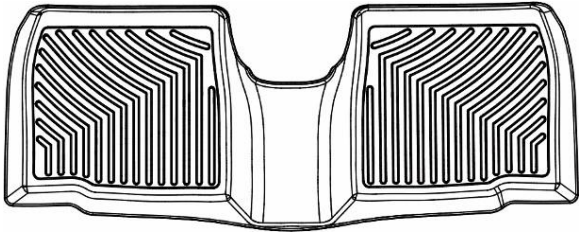

LEFT / DRIVER

RIGHT / PASSENGER

REAR / PASSANGER
RETAINING CLIP:

OEDRO® floor mats contain retaining clips design.

OEDRO® floor mats retaining clips could restrain the mats from moving, which will avoid interfering with the accelerator and


For your safety, please follow the installation and install retaining clips with care. 5. Make sure the mats never interfere the

INSTALLATION INSTRUCTIONS:


FLOOR MATS FLOOR MATS
CARE AND USE INSTRUCTIONS CARE AND USE
INSTRUCTIONS



1. Remove original floor mats.Push seats back to the end.



3. Line up and insert the fixed plug on carpet into the retaining clip.



brake pedals.
pedals.


Note: When installing the retaining clip to the car floor, snap it until there's a "pop" sound. If there's no "pop" sound, please try again. When removing the floor mats, don't over pull it in case of any damage.



2. Put OEDRO® floor mats in place.



4. Adjust and make sure the floor mats are secure and tight.



6. Reset seats.Installation finished.
car floor, snap it until there's a try
1. When removing the damage.